Enclosure series aluTWIN

Type: ATF 100

Material-No.: 105.100.000

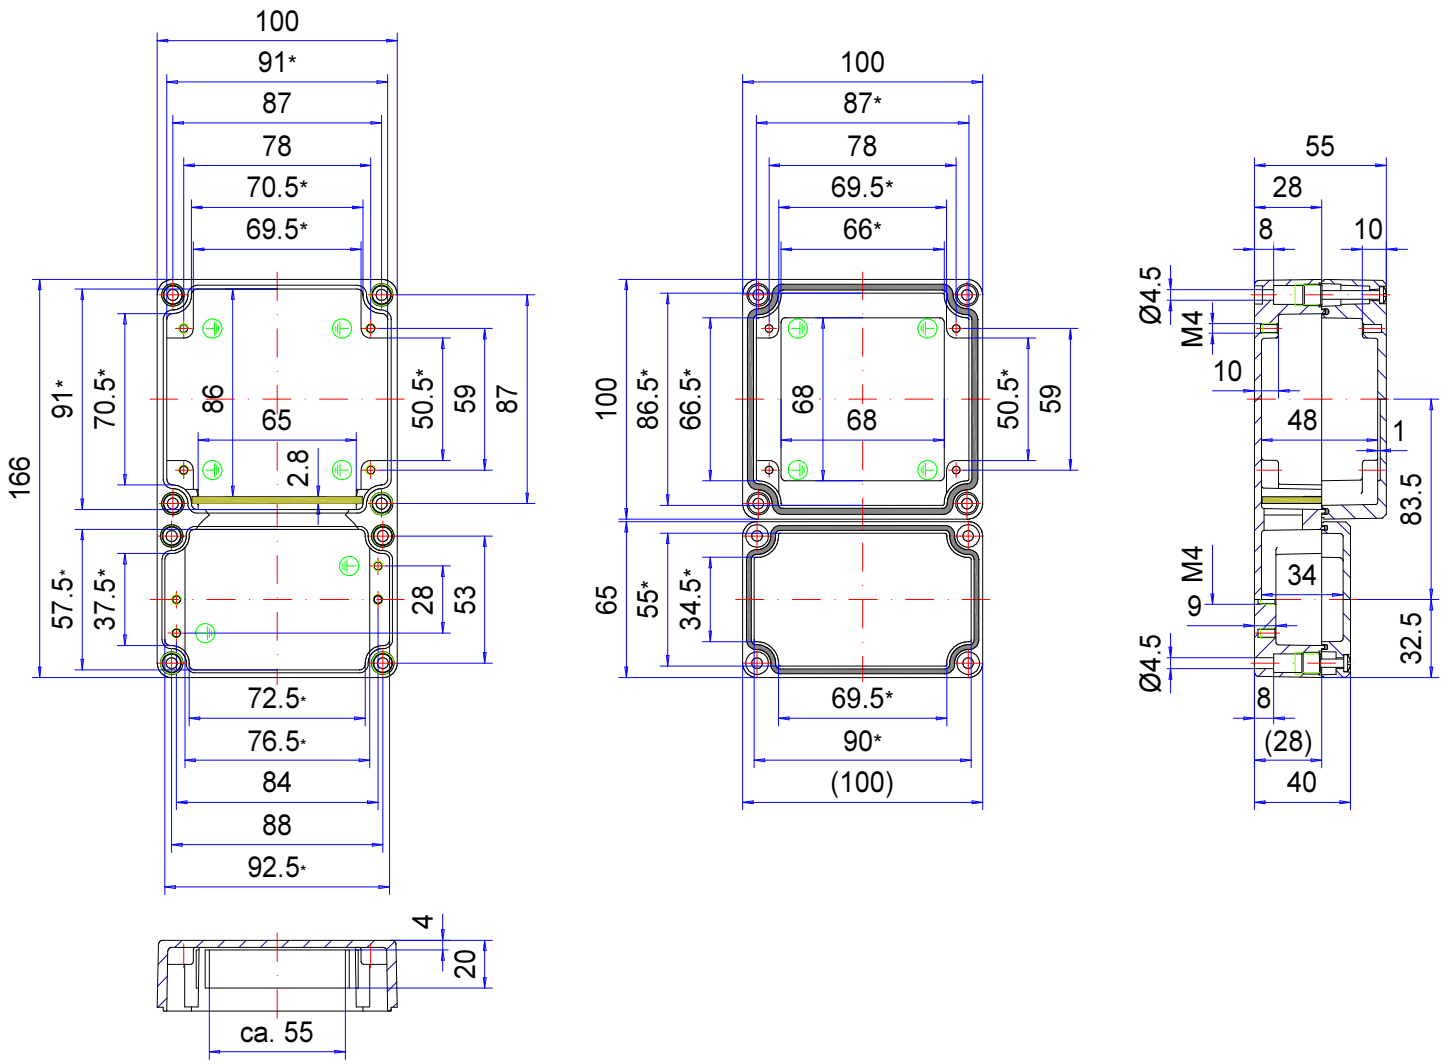

* Please note: Mould slope for casting ejection, dimensions in the amount of the bottom!

Enclosure material	GD-Al Si 12 (DIN 1725)		Weight	730 g
Lid screws	8x stainless steel 1.4567 (V2A), captive		Earthing screws	6x M4x6, copper-plated
Gasket	2x TPE moulded gasket, silicone-free, black		Coating	Powder coating RAL 7040, window grey + RAL 7035, light grey
Ingress protection	IP66 EN 60529		Tolerance	GTA 13/5 DIN 1688-4 (outside dimensions ±0,5mm)

technical changes subjected